


THE "LUCY"

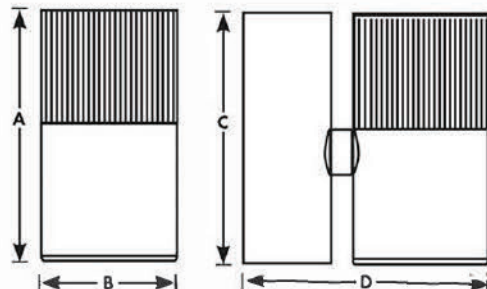




A	4-5/8"
B	2-7/8"
C	4-5/8"
D	5-5/8"

FEATURES

- Beautifully constructed with high quality architectural grade die-cast aluminum
- Precision optics are uniquely constructed to intentionally regress the position of the LED array for glare control.
- Multiple accessories are also available for further glare control.
- Delivering exceptional color rendering by providing 97 CRI and R9=97

busSTRUT	VOLTAGE	TECH	KELVIN TEMP (CCT)	Color Rendering Index (CRI)	DELIVERED LUMENS	WATTS	LM/W	BEAM ANGLE	FINISH (F)	OPTION CODES (OC)	CATALOG NUMBER
20A	120V	LED	3500K	97	2604	30	86.8	24	GR=GREY BL=BLACK WH=WHITE	SN=Snoot HL=Honeycomb Louver	BR-LUCY-U-359-30-U-SD-24-(F)-(OC)

Candela Distribution

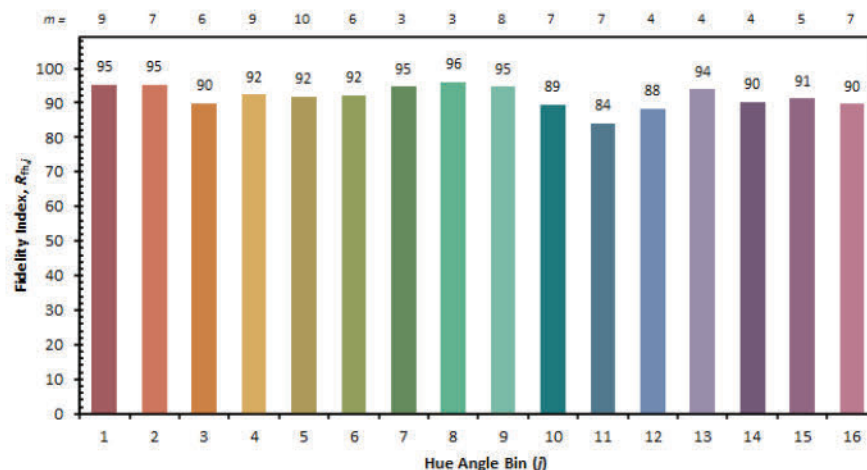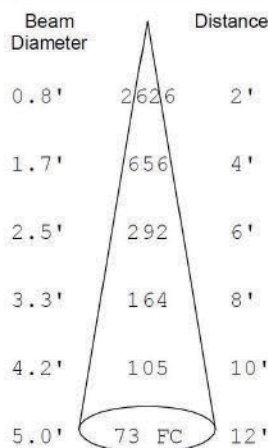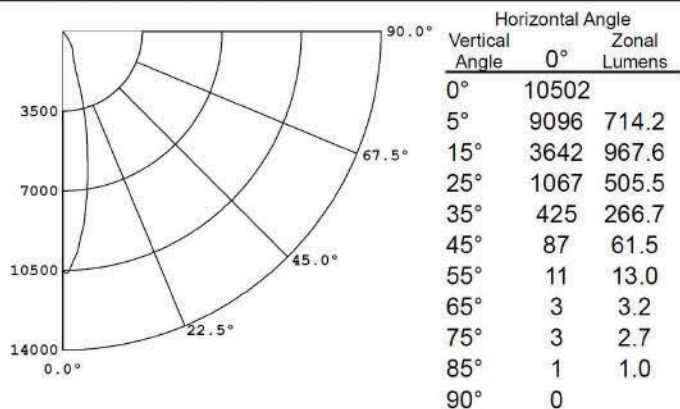

Luminance Data in Candela / Sq. Meter

Angle in Vertical°	Average 0°	Average 45°	Average 90°
45°	9099	7247	9099
55°	1072	832	1072
65°	329	249	329
75°	288	212	288
85°	103	74	103

Beam center footcandles shown in "cone of light" are initial, LLF = 1.0

3500 K Class A

R_a = 97

R₉ = 97

R _f	92
R _g	104